


TECHNICAL SPECIFICATIONS :

MINIMUM / MAXIMUM OPERATING TEMPERATURE : 5 ÷ 70°C
 MINIMUM / MAXIMUM OPERATING PRESSURE : 0,5 ÷ 7 Bar
 RECOMMENDED : 3 ÷ 5 Bar

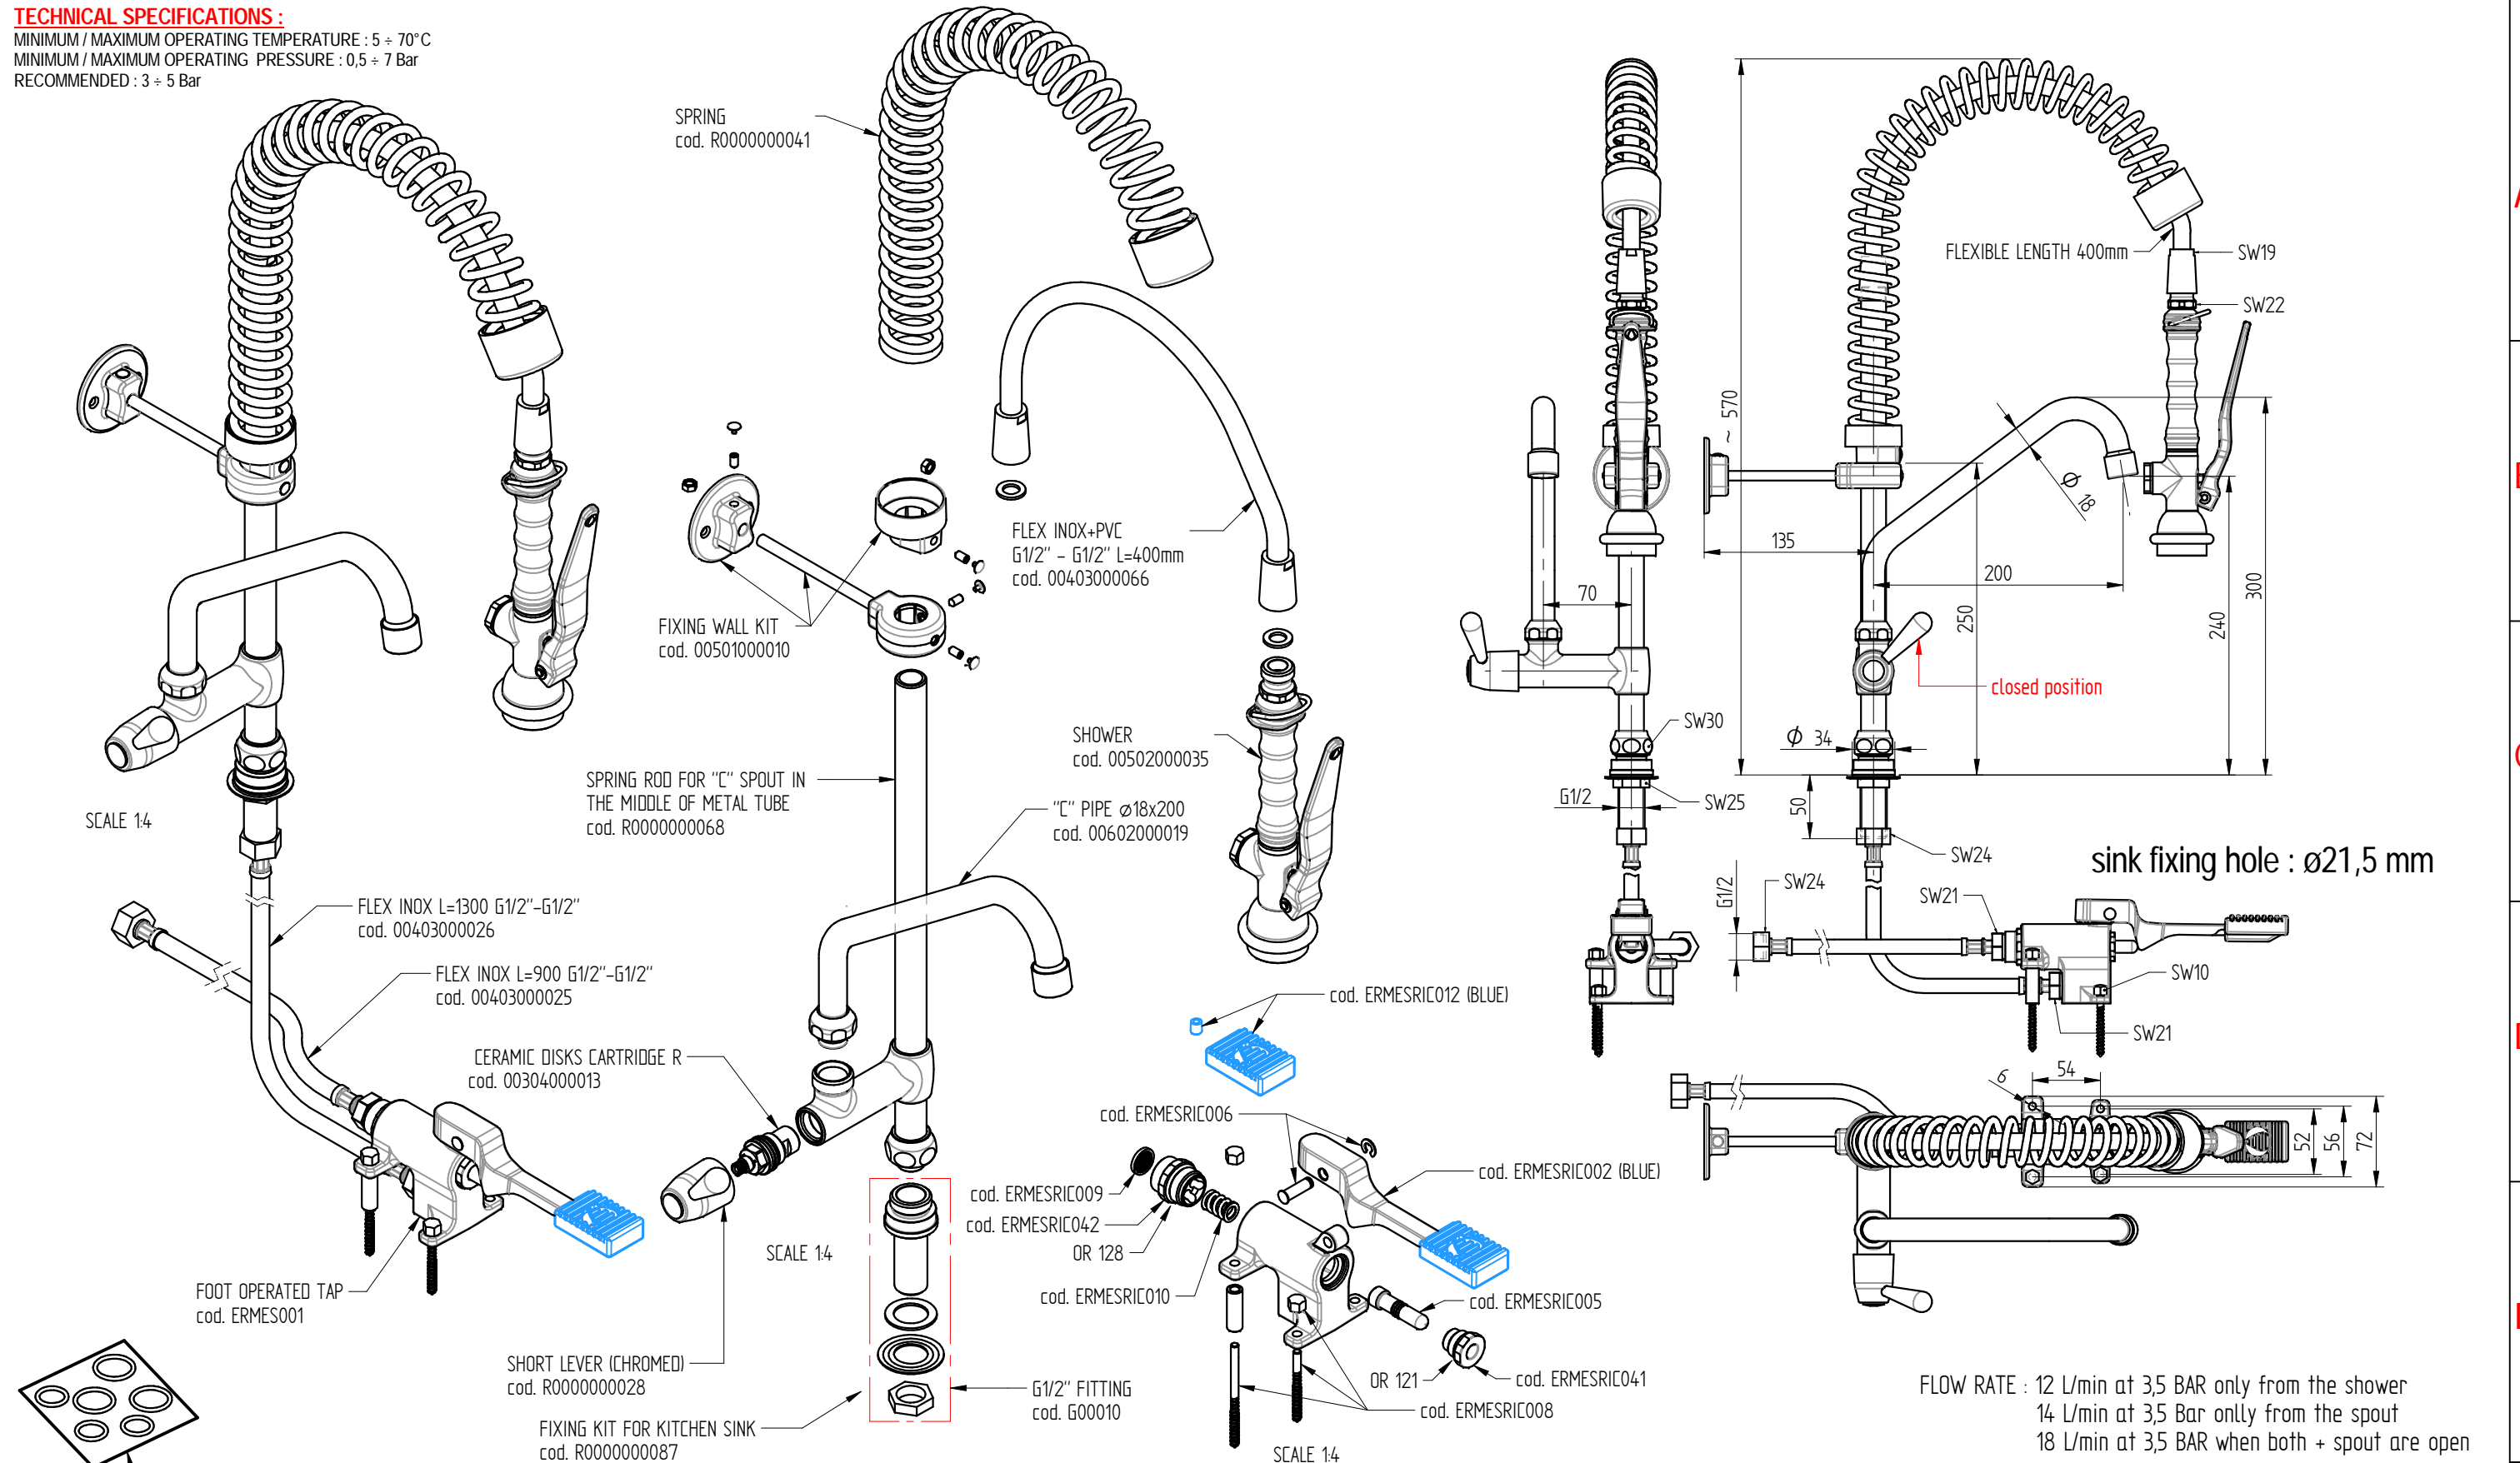

WARNINGS :

- For water supply only
- Suitable for indoor use
- Do not use toxic or abrasive products for the tap cleaning
- Install stop valve with filter (recommended) for maintenance operations
- Install filter gaskets (supplied) in the supply line
- Clean the pipes from debris, by to flow the water, before connecting the tap to the supply line
- Installation for release to specialized personnel

FLOW RATE : 12 L/min at 3,5 BAR only from the shower
 14 L/min at 3,5 Bar onlly from the spout
 18 L/min at 3,5 BAR when both + spout are open

Shares without tolerance according to standard UNI-EN-22768-1-m		DESCRIPTION KIT FOOT OPERATED TAP COLD WATER WITH PRE-RINSE UNIT AND SWINGING "C" SPOUT Ø18x200, LEVER HANDLE, MINI VERSION	CODE ERMES001/MINI192K
SIZE A3	European Projection		WEIGHT 4,12 Kg
DATE 15-06-2022	SCALE 1:5		VIA DELL'ARTIGIANO 8/F-8-G , 31050 MONASTIER di TREVISO (TV) tel: 0422 842157 - fax: 0422 708978 DONE WITH DESIGN CAD - PROHIBITED THE CHANGES MANUAL
DRAWN PICCOLO M.			
VALIDATE PICCOLO M.			