

SPRING
cod. R0000000041

FLEX INOX+PVC
G1/2" - G1/2" L=400mm
cod. 00403000066

FIXING WALL KIT
cod. 00501000010

METAL TUBE D20 L=34cm
cod. R0000000066

SHOWER
cod. 00502000035

FLEX INOX L=1300 G1/2"-G1/2"
cod. 00403000026

FLEX INOX L=900 G1/2"-G1/2"
cod. 00403000025

FOOT OPERATED MIXER TAP
WITH LOCKING DEVICE
cod. ERMES004

FLEX INOX L=900 G1/2"-G1/2"
cod. 00403000025

TECHNICAL SPECIFICATIONS:
MINIMUM / MAXIMUM OPERATING TEMPERATURE : 5 ÷ 70°C
MINIMUM / MAXIMUM OPERATING PRESSURE : 0,5 ÷ 7 Bar
RECOMMENDED : 3 ÷ 5 Bar

sink fixing hole : $\varnothing 21,5$ mm

cod. ERMESRIC034 : KIT O-RING

cod. ERMESRIC023

cod. ERMESRIC004

cod. ERMESRIC013

cod. ERMESRIC038

cod. ERMESRIC030

cod. ERMESRIC024

cod. ERMESRIC018

cod. ERMESRIC028

cod. ERMESRIC029

cod. ERMESRIC032

G1/2" FITTING
cod. G00010

FIXING KIT FOR KITCHEN SINK
cod. R0000000087

cod. ERMESRIC031

cod. ERMESRIC035




WARNINGS :

- For water supply only
- Suitable for indoor use
- Do not use toxic or abrasive products for the tap cleaning
- Install stop valve with filter (recommended) for maintenance operations
- Install filter gaskets (supplied) in the supply line
- Clean the pipes from debris, by to flow the water, before connecting the tap to the supply line
- Installation for release to specialized personnel

cod. ERMESRIC022

cod. ERMESRIC019

cod. ERMESRIC036

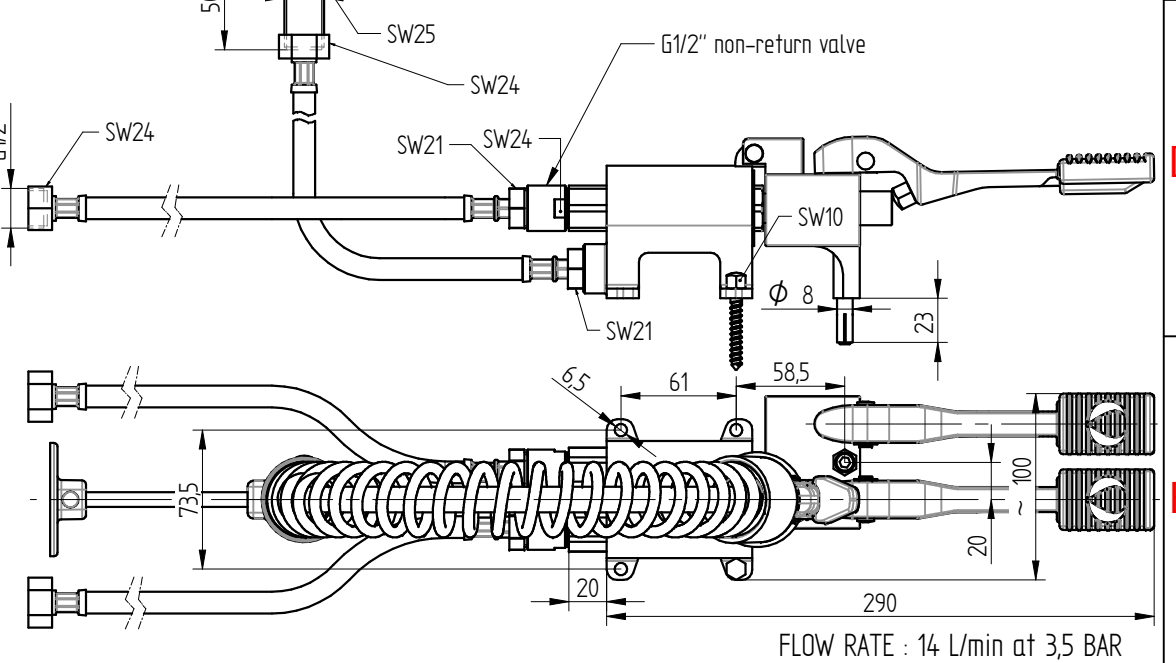

Shares without tolerance according to standard UNI-EN-22768-1-m		DESCRIPTION	CODE
SIZE		KIT FOOT OPERATED PROGRESSIVE MIXER WITH LOCKING DEVICE AND PRE-RINSE UNIT MINI VERSION	ERMES004/MINI112K
A3	European Projection		WEIGHT
DATE	SCALE		5,62 Kg
13-06-2022	1:4		
DRAWN	PICCOLO M.		
VALIDATE	PICCOLO M.		
VIA DELL'ARTIGIANO 8/F-8-G, 31050 MONASTIER di TREVISO (TV) tel: 0422 842157 - fax: 0422 708978			
DONE WITH DESIGN CAD - PROHIBITED THE CHANGES MANUAL			