


CARATTERISTICHE TECNICHE - TECHNICAL CHARACTERISTICS  
CARACTERÍSTICAS TÉCNICAS - CARACTÉRISTIQUES TECHNIQUES

Articolo / Item  
Artículo / Article

**P08A3010102**

Kit doccia sospesa , flessibile inox ACS L=300cm, LINEA PREMIUM  
Hanging shower kit with ACS marked flexible hose L=300cm, PREMIUM LINE  
Kit ducha en suspenso con manguera ACS L=300cm, MODELO PREMIUM  
Kit douchette suspendue avec flexible ACS L=300cm, MODÈLE PREMIUM

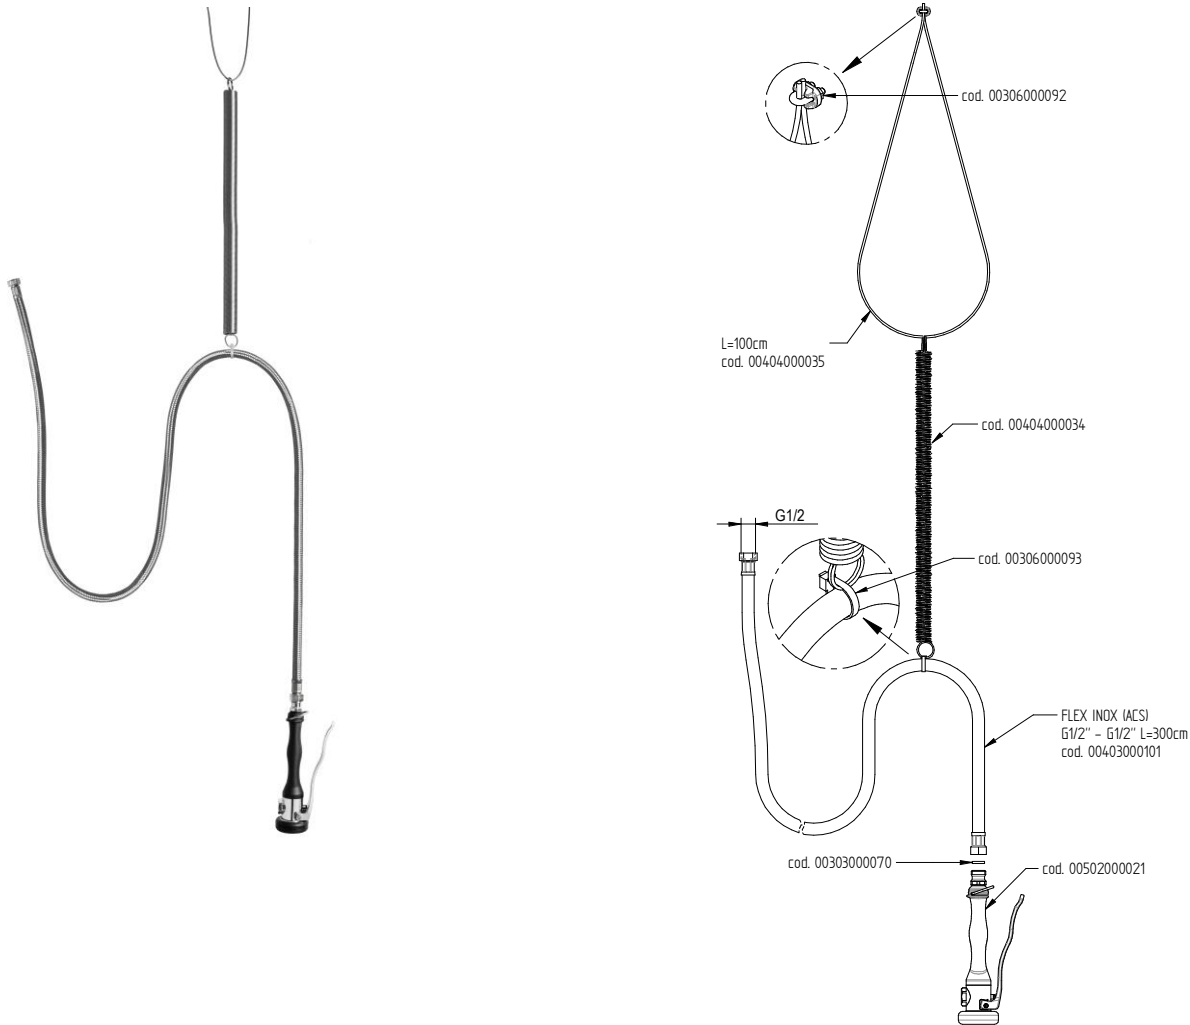

Pressione di alimentazione / Operating pressure / Presión de alimentación / Pression d'alimentation	0,5 – 7 bar
Pressione raccomandata / Recommended pressure / Presión recomendada / Pression recommandée	3 bar
Temperatura di alimentazione / Water temperature / Temperatura de alimentación / Température d'alimentation	5 – 85 °C
Portata / Flow rate / Tasa de flujo / Débit	~ 14 l/min (3 bar)
Composizione / Composition / Composición / Composition	Corpo doccia in ottone cromato / Chromed brass body shower / Cuerpo ducha en latón cromado / Corps poignée en laiton chromé