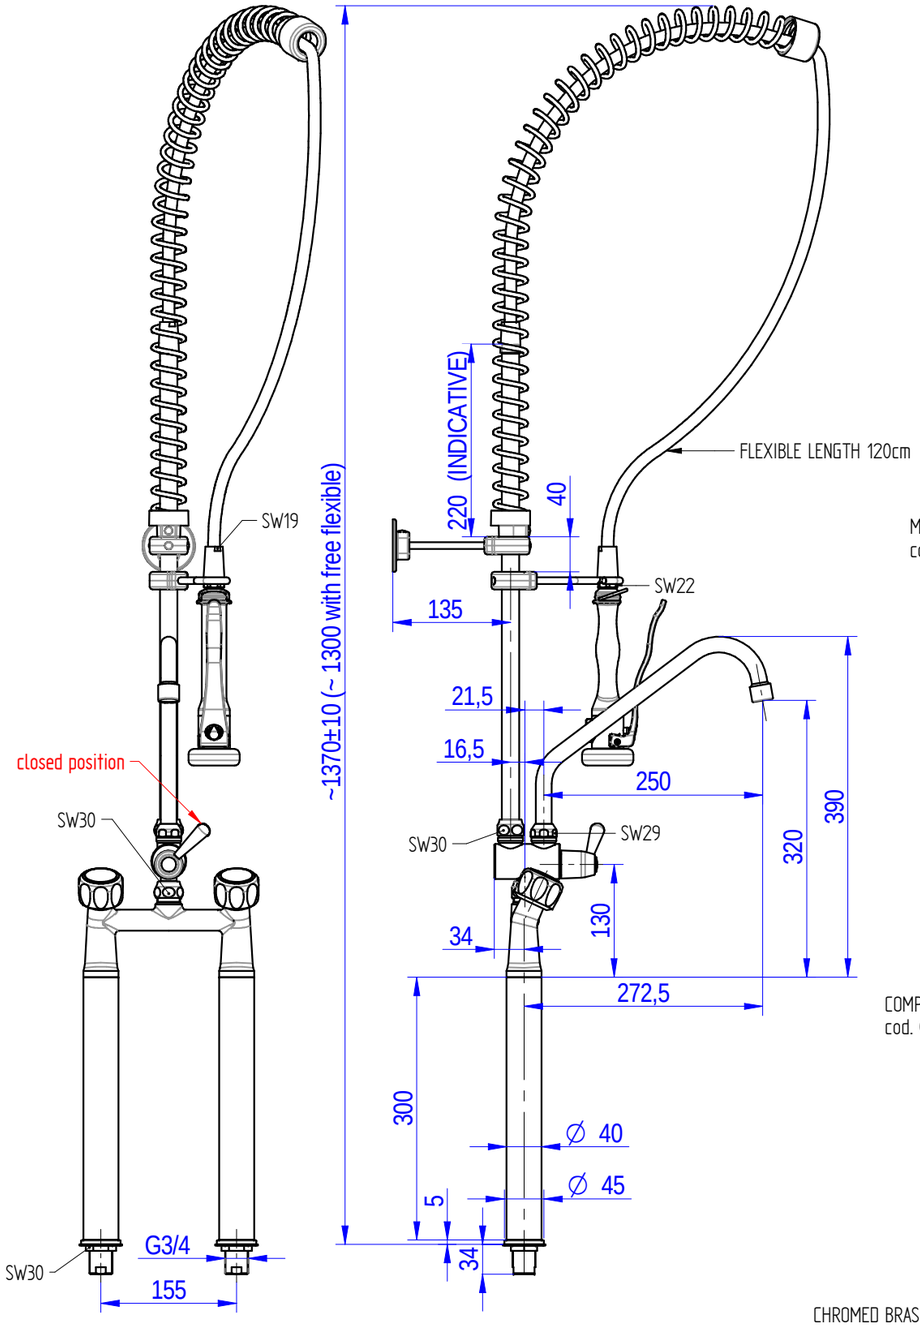

sink fixing holes : ø27 mm

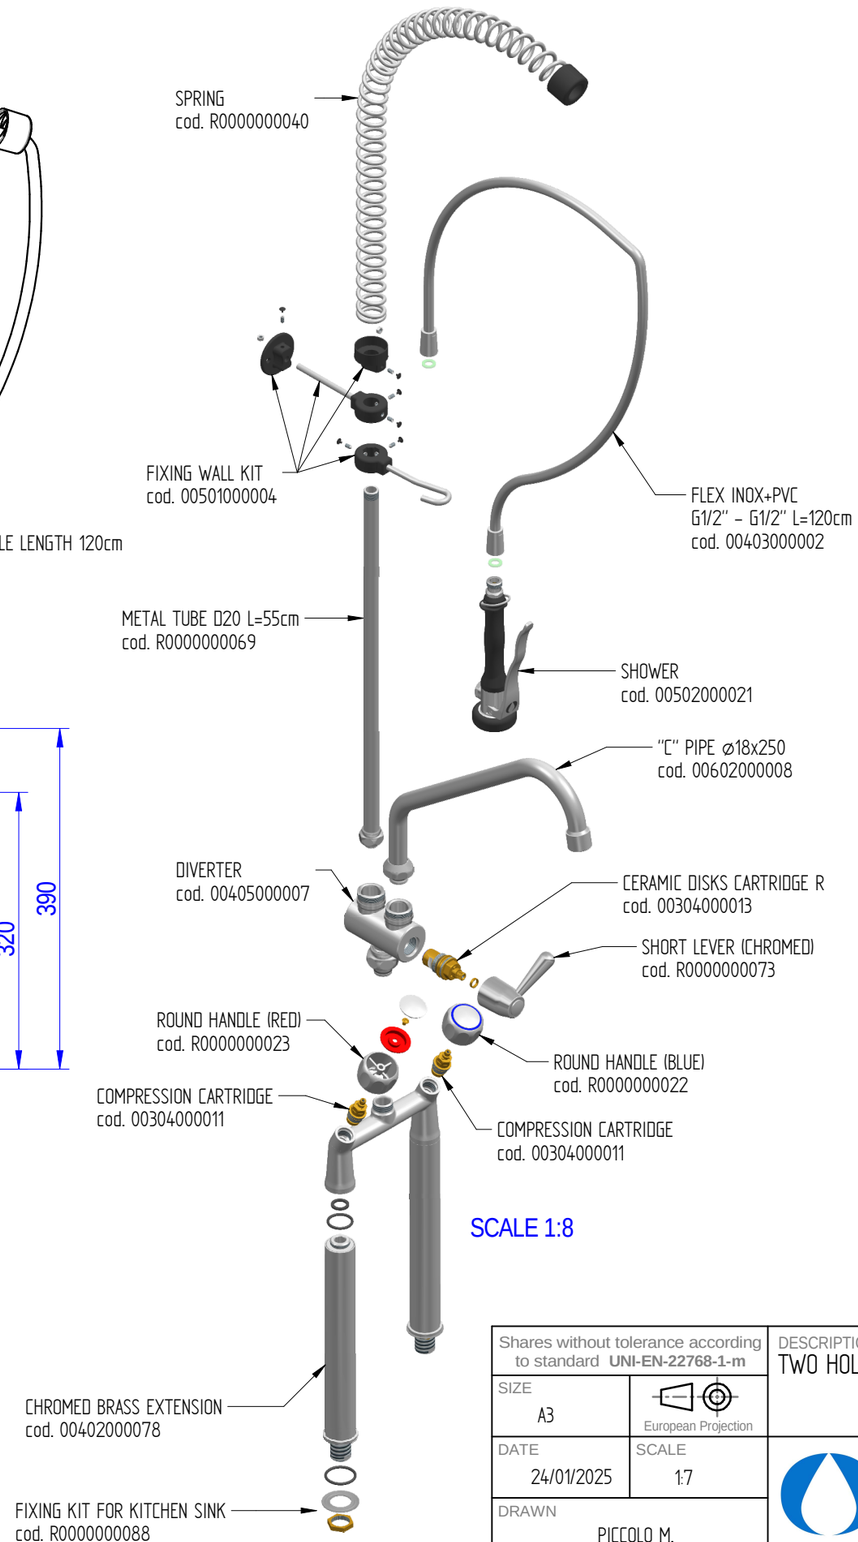

SCALE 1:8

FLOW RATE : 12 L/min at 3,5 BAR only from the shower
14 L/min at 3,5 Bar onlly from the spout
18 L/min at 3,5 BAR when both + spout are open

Shares without tolerance according to standard **UNI-EN-22768-1-m**		DESCRIPTION: TWO HOLES PRE-RINSE UNIT WITH EXTENSIONS, ROUND HANDLE, "C" SPOUT ø18x250, PREMIUM SHOWER HAND. 155mm FIXED WHEELBASE	CODE: EXTBF0070P
SIZE: A3	European Projection		WEIGHT: 7,39 Kg
DATE: 24/01/2025	SCALE: 1:7		
DRAWN: PICCOLO M.			
VALIDATE: PICCOLO M.			

MONOLITH
DESIGN AND TECHNOLOGICAL RESEARCH FOR WATER

VIA DELL'ARTIGIANO 10 , 31050 MONASTIER di TREVISO (TV) tel: 0422 842157 - fax: 0422 708978

DONE WITH DESIGN CAD - PROHIBITED THE CHANGES MANUAL

Rev. 00